

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number  
**WO 2004/082838 A1**

(51) International Patent Classification<sup>7</sup>: **B03B 5/60**,  
5/64, 5/36, 5/28

(21) International Application Number:  
PCT/NL2004/000186

(22) International Filing Date: 16 March 2004 (16.03.2004)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1022953 17 March 2003 (17.03.2003) NL  
1024818 20 November 2003 (20.11.2003) NL

(71) Applicant (for all designated States except US): **TECH-  
NISCHE UNIVERSITEIT DELFT** [NL/NL]; Ju-  
lianalaan 134, NL-2628 BL Delft (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **REM, Peter, Carlo**

[NL/NL]; Jaagpad 5B, NL-2288 AB Rijswijk (NL). **VAN  
KOOY, Laurens, Anton** [NL/NL]; Baron Van Geltingen-  
laan 33A, NL-2273 CX Voorburg (NL).


(74) Agents: **PLAGGENBORG, Menko, Bernard et al.**;  
Octrooibureau Los en Stigter B.V., Weteringschans 96,  
NL-1017 XS Amsterdam (NL).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR THE SEPARATION OF PARTICLES

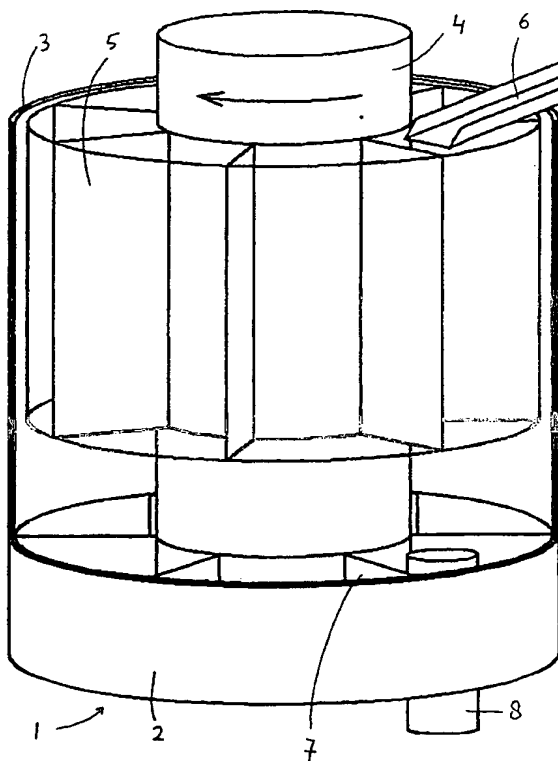

(57) Abstract: The invention relates to a method of separating a particle fraction from a particle stream making use of gravitational force and which is performed in a fluid. This provides particle fractions that are collected in respective collecting means. According to the invention the fluid and the collecting means are moved in relation to each other defining a relative direction of movement. There are means provided to limit the movement of the particles to be separated with respect to the fluid in the relative direction of movement. The invention also relates to an apparatus for carrying out the method.

WO 2004/082838 A1

Express Mail Label  
EV336980342US



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Method and device for the separation of particles

The present invention relates to a method according to the preamble of claim 1 and an apparatus according to the preamble of claim 15.

Such a method and apparatus are known in the art.

- 5 An apparatus and method of this kind are described, for example, in the German patent application DE 1 119 191. However, the results obtained with this apparatus are not favourable because the distance between the means bringing the fluid into motion is too large. As a consequence the
- 10 particles undergo a very wide horizontal distribution, which has a negative effect on the separation. The known method and apparatus therefore leave considerable room for improvement.

- It is the object of the present invention to improve the known method, and in particular to make it
- 15 possible to produce a better separation wherein the second fraction is less contaminated with particles that, as regards the type of material, rightfully belong in the heavy particle fraction and/or vice versa.

- To this end the method according to the invention
- 20 is characterised by the measure described in the characterising part of claim 1. This has a very strong and positive influence on the separation of particles by means of this method.

- Surprisingly it has been found that particles,
- 25 which not only differ from each other with respect to density, but also with respect to size and/or shape, can be effectively separated according to type of material. The term "separation influenced by gravity, based on difference in vertical velocity" used in the present application signifies
- 30 that an oscillating motion in vertical direction (as known from jiggling) is avoided and more generally, turbulence that causes the distribution of particles in the horizontal plane, is avoided. In practice therefore, the time of fall of the particles will be determined by the gravitational force and

the interaction with the fluid, and not by other forces exerted on the particles by the apparatus. With respect to the earlier reference to turbulence it is remarked that in the present case, turbulence resulting from the addition of particles to the liquid medium is left out of consideration. In other words, turbulence relates to the turbulence of fluid in the container in absence of the particles. "Heavy particles" in the present application are understood to be particles that fall through the fluid more quickly than other particles (the light particles). The relative direction of movement is at an angle to the vertical; the first and second collecting means are placed at an angle to the vertical, wherein the orientation of the horizontal component of the relative direction of movement is not perpendicular to the orientation defined by the line between the first and second collecting means.

It is possible to have the fluid stand still while the collecting means are being moved. In such a case the method must be performed such that the particle stream is added in pulses or that the feed moves with the collecting means. The ordinary person skilled in the art requires no explanation regarding the precise dimensions of the parameters, since they can be determined by means of routine experiments. However, in accordance with a preferred embodiment the fluid is transported at right angles to the vertical.

The feed of the particle stream and the collecting means may then remain stationary, which simplifies the technical construction of the apparatus and safeguards the reliability during operation. In addition to that, the turbulence is minimal, which contributes to an optimal separation.

According to the invention, the baffles fulfil two functions, namely moving the fluid and improving the separation.

In this way, an excellent separation can be achieved.

The particles are preferably introduced into a vessel having a substantially circular horizontal cross section, and the fluid moves uniformly around the vessel in the circumferential direction.

5 In such a case the particles that are introduced into the fluid are preferably radially distributed. In practice an effective separation in the vicinity of the rotation axis will not be efficient so that this part of the vessel is excluded for separation. This may be realised, for  
10 example, by the presence of a concentrically placed cylinder in the vessel. It is preferred for this vertically oriented cylinder to co-rotate, and for the baffles to be mounted on the cylinder.

The use of a vessel having a substantially circular  
15 horizontal cross section is cheap and it produces little turbulence to disturb the separation.

According to a preferred embodiment, the fluid is a liquid medium.

In a liquid medium the fall resistance is greater,  
20 so that the duration of fall is prolonged. This means that in the relative direction the particles are entrained over a greater distance, and this facilitates a better separation.

According to a very advantageous embodiment the liquid medium is an aqueous medium, in particular water.

25 Water is a cheap, inert and non-toxic liquid medium.

According to an important application, the particle stream is formed by particles of a waste stream. In accordance with a first embodiment, the waste stream to be  
30 separated comprises metal particles to be separated. The metal can be sold so that a portion of the waste stream can be turned into money.

According to an alternative embodiment, the particle stream comprises plastic particles.

35 In this way the invention provides a method for separating plastics, such as shredded scrap plastic.

The separation of plastics was shown to be very effective when using air as fluid.

For a further improved separation the particles are subjected to a classification treatment prior to their introduction into the fluid.

In accordance with an important embodiment, the  
5 particles are introduced into the liquid medium according to size at various locations in the relative direction of movement, such that the largest particles are the closest to the collecting means.

To particles of the same material and shape applies  
10 that the duration of fall still depends on the size of the particle. By classifying the particles, and depending on their size introducing them into the liquid at a different location, their spreading due to particle size may be greatly reduced. When speaking of "being the closest to the  
15 collecting means", this refers to the horizontal directional component in the relative direction of movement. It is advantageous to use a drum screen with rectangular slits or bars. This is shown to significantly increase the size range of particles that can still be effectively separated. It is  
20 also advantageous to perform a separation using air as fluid before performing the separation using a liquid.

Although the method according to the invention can be carried out in batches, continuous operation is preferred. According to a preferred embodiment, the first relatively  
25 heavy and the second relatively light particle fractions are at the underside of the container separately discharged via a respective discharge opening of the container.

In order to effectively remove the particles that have landed on the floor of the container it is preferred to  
30 use a jet stream. As it is generally difficult to remove wire-shaped materials by means of jet streams, it is preferred to remove such wire-shaped materials from the particle stream prior to the separation with the fluid.

The invention also relates to an apparatus for  
35 separating particles, which apparatus comprises a vessel provided with baffles that extend radially from a shaft placed vertically in the centre of the vessel, toward the circumferential wall of the vessel, and wherein the vessel is

provided at its underside with at least two collecting means having their own discharge means.

Preferably there are means provided for driving the baffles, which in that case are able to carry along a liquid  
5 medium introduced into the vessel.

There are preferably at least 10 baffles, preferably at least 20 and more preferably at least 30.

It is also preferred for the circumferential wall of the vessel, which when in use is in contact with the  
10 fluid, to be designed to rotate at the same number of revolutions as the shaft.

This may be realised simply by attaching the baffles to the circumferential wall. There are various advantages. First, the turbulence is reduced, which  
15 contributes to a good separation. Second, no particles can become lodged between the rotating and the stationary circumferential wall, which increases the operational safety.

A further preferred embodiment is obtained if the vertical velocity of the fluid is such that in a container  
20 having a substantially circular horizontal cross section, the fluid present at the feed level will during one circulation of the fluid have moved at least as far as the collecting means. In this way the particles with very low terminal velocities are also transported to the collecting means and,  
25 viewed in the circumferential direction, are collected in substantially a last collecting means. Such a vertical movement of the fluid may be obtained by, for example, in the vicinity of the collecting means or after the discharge therefrom, withdrawing fluid from the discharge stream and,  
30 optionally after the removal of impurities, returning this to the feed level where the particle stream to be separated is introduced.

The present invention is elucidated by way of the following experiment and with reference to the drawing,  
35 wherein the only figure depicts an apparatus for carrying out the treatment according to the invention.

The only figure shows a partly cut-away drawing of an apparatus 1 suitable for carrying out the method according

to the invention. The apparatus comprises a vessel 2 having a wall 3. The vessel 2 is provided with an inner cylinder 4, which is provided with baffles 5 (only a limited number is shown. The apparatus used, having a diameter of 1 meter actually possessed 50 baffles). The inner cylinder 4 is driven by a motor (not shown). Via a feed vessel 6 a particle stream to be treated can be supplied over at least substantially the total distance between the outer wall 3 of the vessel 2 and the inner cylinder 4. There is little turbulence in the liquid medium, such as water, carried along between the baffles 5, and an excellent separation can be achieved. In the bottom of vessel 2 stationary receptacles 7 are provided in which the various fractions are collected. The floor of each receptacle 7 may taper and may comprise a channel that is open at the top and connected to a discharge pipe, via which with the aid of a jet stream from a nozzle, particles that have found their way into the channel are discharged (not shown). Finally, there is a (schematic) illustration of a feed opening 8 that can be used for the feed of a liquid medium containing the particles to be separated that have a lower density than the liquid medium, as may be the case with plastic particles such as polyethylene/polypropylene particle mixtures with water as fluid. In such a case collecting means are provided at the top side of the vessel 2 for the removal of the separated plastic particles.

In the experiment, bottom ash was first sifted, subjected to a first separation (magnetic) and subsequently to a fall separation.

### Sifting

In a large-scale experiment bottom ash from a waste incineration plant was sifted wet, wherein as well as a very coarse and a very fine fraction, a fraction of 2-6 mm and a fraction of 50 micron - 2 mm were produced.



### Magnetic separation

Prior to the separation according to the velocity of fall in water, the 2-6 mm fraction is first treated with a rotary drum eddy-current separator under the conditions shown in Table 1. The data on the feed and the product streams as estimated from analyses, are presented in Table 2. In this treatment a separator is used having a magnetic rotor with 18 poles (9 north poles and 9 south poles), with the rotor rotating counter to the usual direction at 1000 rotations per minute. Assuming a field change signifies the complete cycle of the magnetic field of the rotor at a fixed point, then the separation is carried out at  $(9 \times 1000 / 60 =)$  150 field changes per second. The field intensity was approximately 0.3 Tesla at the surface of the conveyer belt conveying the material over the magnetic rotor. The material was collected at a level of approximately 66 cm under the shaft of the rotor in three collecting vessels (1: more than 45 cm from the rotor shaft, 2: between 30 and 45 cm from the rotor shaft, and 3: less than 30 cm from the rotor shaft). With the feed approximately 100 kg water were added to the wet-sifted fraction, in order to increase the moisture content to 15%. Considering the particle size of the feed, the number of field changes per second was unusually low. However, two control experiments with small amounts of feed (Table 3) show that the amount of recovered non-ferrous compounds in the concentrate does not significantly increase if the rotor speed is increased to 2000 rpm, while at the higher rotor speed lightly magnetic particles are entrained to the non-ferrous fraction, with possible adverse effects for the non-ferrous products.

### Separation in liquid medium (treatment b))

The products 1 and 2 of this first treatment were combined and a portion thereof, i.e. approximately 80 kg, was separated according to velocity of fall in water, by feeding the material over the width of the annular vessel whose sides are formed by an outer cylinder having a 1 m diameter and a concentric inner cylinder having a 0.5 m diameter, both having a vertical (coinciding) axis and being 1.0 meter high,

filled with water moving in a homogenous circulating movement and provided at the underside with six equal receptacles, successively arranged in the direction of circulation. The water movement was generated by a rotating impeller of

5 radially extending baffles mounted on the likewise rotating inner cylinder (engine power 2 kW). The baffles were connected with an outer wall that co-rotated in order to limit the turbulence in the water. The speed of rotation was 5 rpm. The heavy non-ferrous fraction was collected in the

10 first receptacle after the feed point, and the light, non-ferrous metal-depleted product was collected in the two succeeding receptacles. Importantly, this wet separation also resulted in the reduction of organic material in the non-ferrous metal-depleted fraction. This means that said

15 material, comprising mainly sand and stone, is less liable to give off metals to the environment as a result of leaching. This makes it better usable as material for road construction and the like. A portion of the organic material was discharged over the rim of the vessel, and some of it found

20 its way into other receptacles at the bottom of the vessel. Table 4 shows the weight of non-metal, aluminium and heavy non-ferrous in the light and heavy product. It can be seen that more than 90% consists of heavy non-ferrous metal, containing little aluminium (which is very favourable with

25 respect to the saleability of the heavy non-ferrous metal). The light fraction contains mainly sand and some non-ferrous, which by means of Magnus separation can be separated in the form of aluminium concentrate. The size fraction between 3.5 and 7 mm was not analysed since it was patently obvious that

30 it contained very little non-ferrous, especially aluminium. Summarising it may be said that in comparison with the known methods, the described apparatus and method facilitate an excellent separation with a large turnover, little wear and low energy consumption.

35 The fact that a particular measurement was not carried out, usually because the value was deemed to be insignificant, is in the table indicated by '/'.

Table 1: Process conditions pre-separation. Positions in  
5 relation to the shaft of the rotor.

Rotor speed (rpm)	-1000
Number of poles	18
Belt velocity (m/s)	0.94
Belt width (m)	0.75
Level of splitters (vert. cm)	-66
Position splitter 1 (hor. cm)	30
Position splitter 2 (hor. cm)	45
Moisture content feed (% by weight)	15
Feed (kg)	1118
Feed speed (kg/s)	8.5
Processing time (min)	20

10

Table 2: Feed, added water and products from pre-separation

	<i>Weight (kg)</i>
Feed sifted wet	1015
Water (added)	103
Feed dry	943
Water (total)	175
Total feed	1118
Product 1 dry	28
Product 2 dry	96
Product 3 dry	836
Heavy non-ferrous in 3	Non detectable
Aluminium in 3	2.5

15

Table 3: Results at 1000 rpm (top) and at 2000 rpm (bottom) for products 1, 2, and 3.

	Al	Zn/Cu	Mag.	Non Mag.	Tot.
1	21.4	17.4	/	311.4	350.2
2	15	25.6	/	7671.36	7711.96
3	0.5	/	5798.05	5349.95	11148.5
Tot.	36.9	43	5798.05	13332.71	19210.66

5

	Al	Zn/Cu	Mag.	Non Mag.	Tot.
1	18.08	18.03	58.28	277.92	372.31
2	17.49	21.37	476.5	6448	6963.36
3	0.13	0.73	8036	4306	12342.86
Tot.	35.7	40.13	8570.78	11031.92	19678.53

Table 4: Results from the separation according to velocity of fall in water of approximately 80 kg pre-concentrate of 2-6 mm wet sifted bottom ash.

Heavy	Al (g)	Zn/Cu (g)	Stone (g)	Tot. (g)
+5.6 mm	133.65	3824.81	877.57	4836.03
-5.6 +4 mm	48.033	3160.047	45.02	3253.1
-4mm	/	2920	/	2920
Tot.				11009.13

Light	Al (g)	Zn/Cu (g)	Stone (g)	Tot. (kg)
-3.5 mm	459.108	177.741	4504.80	5.141
-7 +3.5 mm				37.38
+7 mm				22.75
Tot.				65.271

CLAIMS

1. A method of separating a particle fraction from a particle stream, wherein the particles of the particle stream are separated in a fluid in a container under the influence of gravitational force based on difference in vertical velocity, wherein the fluid and the particles are moved in a substantially horizontal direction defining a relative direction of movement, and wherein at a first location a first particle fraction is collected, and at a second location somewhat removed from the first location, a second particle fraction is collected in respective collecting means, wherein means are provided for causing the fluid to move in the relative direction of movement, **characterised** in that the means are placed maximally 3, preferably maximally 2 and most preferably less than 1 x the diameter of spread of the particles that spread out the most of the particle fraction spreading out the most.

2. A method according to claim 1, **characterised** in that the particles are introduced into a vessel having a substantially circular horizontal cross section and the fluid is moved uniformly in the circumferential direction in the vessel.

3. A method according to claim 1, **characterised** in that a container is used wherein the means are formed by baffles placed in the vessel and radiating from a shaft placed vertically in the centre of the vessel, toward the circumferential wall of the vessel.

4. A method according to one of the preceding claims, **characterised** in that as fluid a liquid medium is used.

5. A method according to claim 4, **characterised** in that a liquid medium is used having a density lower than that of the particles.

6. A method according to claim 5, **characterised** in that a liquid medium is an aqueous medium.

7. A method according to one of the preceding claims, **characterised** in that the particle stream is formed by particles of a waste stream.

8. A method according to claim 7, **characterised** in  
5 that the waste stream to be separated contains metal particles.

9. A method according to claim 7, **characterised** in that the particle stream contains plastic particles.

10. A method according to one of the preceding  
10 claims, **characterised** in that prior to their introduction into the fluid, the particles are subjected to a classification treatment.

11. A method according to one of the preceding  
15 claims, **characterised** in that the introduction into the fluid occurs in a particle size-dependent manner at different locations along the relative path of movement, such that the larger particles are the closest to the collecting means.

12. A method according to one of the preceding  
20 claims, **characterised** in that at the underside of the container the first relatively heavy and the second relatively light particle fractions are discharged separately via a respective discharge opening in the container.


13. A method according to claim 12, **characterised**  
25 in that the discharge occurs by using a jet stream.

14. A method according to one of the preceding  
claims, **characterised** in that the fluid has a vertical  
velocity such that the fluid originally present at the feed  
level in a container having a substantially circular  
horizontal cross section, will during one circulation of the  
30 fluid have moved at least as far as the collecting means.

15. An apparatus for the separation of particles,  
which apparatus comprises a vessel provided with baffles  
radiating from a shaft placed concentrically in the vessel  
and in the direction of a circumferential wall of the vessel,  
35 and wherein the vessel at the bottom or top is provided with  
at least two collecting means having their own discharge  
means, **characterised** in that there are at least 10 baffles,

preferably at least 20 baffles and more preferably at least 30 baffles.

16. An apparatus according to claim 15,  
**characterised** in that the circumferential wall of the vessel,  
5 which in use is in contact with the fluid, is designed for  
rotating at the same rotational speed as the shaft.

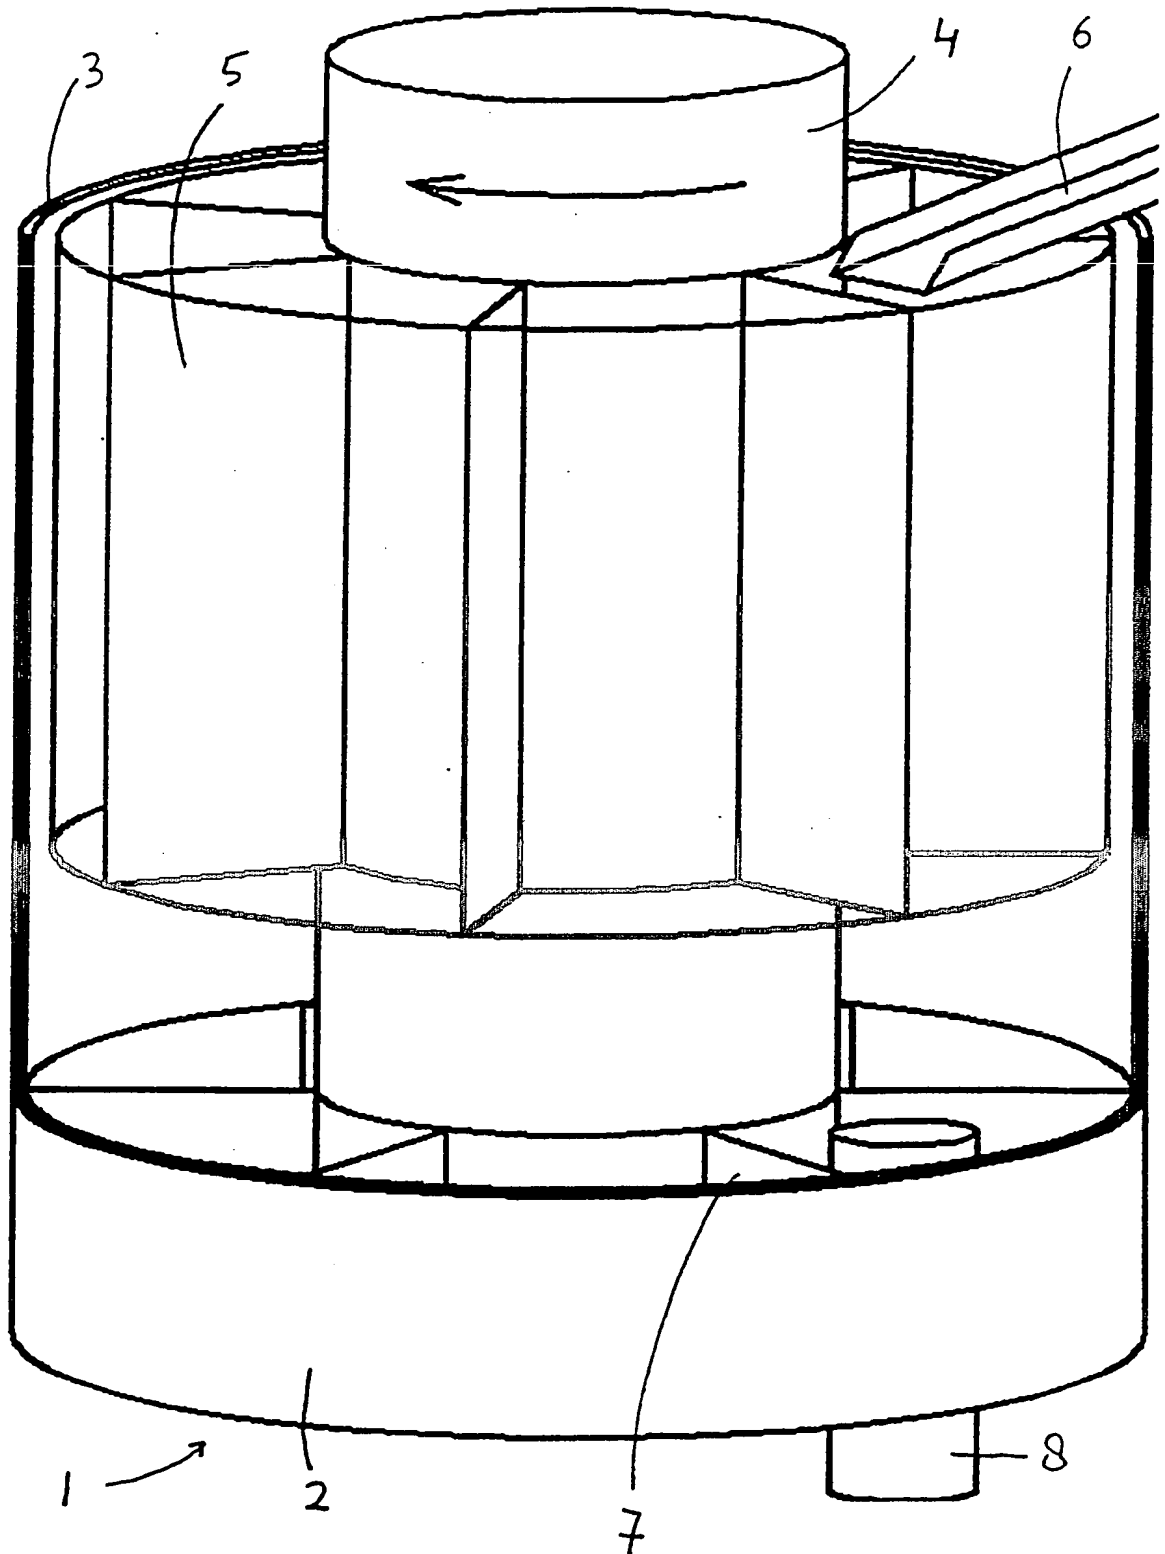



## INTERNATIONAL SEARCH REPORT

NL2004/000186

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B03B5/60 B03B5/64 B03B5/36 B03B5/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 11 19 191 B (THEODOR EDER DR) 14 December 1961 (1961-12-14)	1-6, 10-12, 14-16
Y	the whole document	7-9, 13
Y	DE 43 09 326 A (PAGENKOPF INGEBORG DR) 22 September 1994 (1994-09-22) the whole document	7-9
Y	US 2 854 136 A (GILLIE PERCY H ET AL) 30 September 1958 (1958-09-30) column 2, line 47 - column 3, line 18; figures	13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

16 June 2004

Date of mailing of the international search report

02/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Leitner, J

## INTERNATIONAL SEARCH REPORT

NL2004/000186

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 1119191	B	14-12-1961	NONE	
DE 4309326	A	22-09-1994	DE 4309326 A1	22-09-1994
			AT 152637 T	15-05-1997
			AU 677648 B2	01-05-1997
			AU 6373394 A	11-10-1994
			CA 2156157 A1	29-09-1994
			CZ 9502395 A3	14-02-1996
			WO 9421382 A1	29-09-1994
			DE 59402670 D1	12-06-1997
			EP 0689479 A1	03-01-1996
			HU 76076 A2	30-06-1997
			JP 3492691 B2	03-02-2004
			JP 8509650 T	15-10-1996
			PL 308741 A1	21-08-1995
			US 5738222 A	14-04-1998
US 2854136	A	30-09-1958	NONE	